


# Gewindeeinsätze für Thermoplaste

Einbringung durch Wärme oder Ultraschall  
SERPLAST- Typ DC

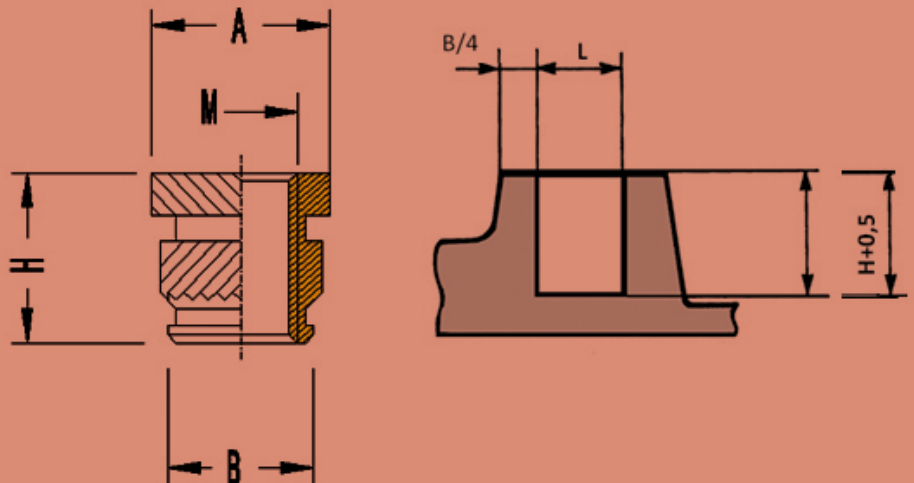

M	H	A	B	L		Kurzbezeichnung SIMAF			
2	4.53	4.8	3.1	3.2		DC	20	H	40
2	3.53	4.8	3.1	3.2		DC	20	H	30
2.5	6.31	5.5	3.9	4		DC	25	H	57
2.5	4.61	5.5	3.9	4		DC	25	H	40
3	6.31	5.5	3.9	4		DC	30	H	57
3	4.61	5.5	3.9	4		DC	30	H	40
3	5.41	5.5	3.9	4		DC	30	H	48
3.5	7.86	6.4	4.7	4.8		DC	35	H	71
3.5	5.76	6.4	4.7	4.8		DC	35	H	50
4	9.11	7.1	5.5	5.6		DC	40	H	82
4	4.91	7.1	5.5	5.6		DC	40	H	40
4	5.71	7.1	5.5	5.6		DC	40	H	48
4	6.71	7.1	5.5	5.6		DC	40	H	58
5	10.59	7.9	6.3	6.4		DC	50	H	95
5	6.89	7.9	6.3	6.4		DC	50	H	58
6	14.05	9.5	7.9	8		DC	60	H	127
6	8.15	9.5	7.9	8		DC	60	H	68
6	10.85	9.5	7.9	8		DC	60	H	95
8	14.05	11.1	9.5	9.6		DC	80	H	127

Manuelles oder halbautomatisches thermisches Setzgerät für SERPLAST Gewindeeinsätze auf Anfrage.